

## Ultrahigh-Speed Switching Applications


### Features

- Low ON resistance.
- Ultrahigh-speed switching.
- Low-voltage drive.
- Micaless package facilitating mounting.

### Package Dimensions

unit:mm

2063A

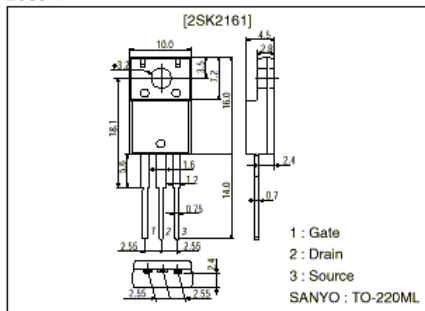

### Specifications

#### Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Drain-to-Source Voltage	$V_{DS}$		200	V
Gate-to-Source Voltage	$V_{GS}$		$\pm 20$	V
Drain Current (DC)	$I_D$		9	A
Drain Current (Pulse)	$I_{DP}$	$PW \leq 10\mu\text{s}$ , duty cycle $\leq 1\%$	36	A
Allowable Power Dissipation	$P_D$	$T_c = 25^\circ\text{C}$	2.0	W
			25	W
Channel Temperature	$T_{ch}$		150	$^\circ\text{C}$
Storage Temperature	$T_{stg}$		-55 to +150	$^\circ\text{C}$

#### Electrical Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Drain-to-Source Breakdown Voltage	$V_{(BR)DSS}$	$I_D = 1\text{mA}$ , $V_{GS} = 0$	200			V
Gate-to-Source Breakdown Voltage	$V_{(BR)GSS}$	$I_G = \pm 100\mu\text{A}$ , $V_{DS} = 0$	$\pm 20$			V
Zero-Gate Voltage Drain Current	$I_{DSS}$	$V_{DS} = 200\text{V}$ , $V_{GS} = 0$			100	$\mu\text{A}$
Gate-to-Source Leakage Current	$I_{GSS}$	$V_{GS} = \pm 16\text{V}$ , $V_{DS} = 0$			$\pm 10$	$\mu\text{A}$
Cutoff Voltage	$V_{GS(off)}$	$V_{DS} = 10\text{V}$ , $I_D = 1\text{mA}$	1.5		2.5	V
Forward Transfer Admittance	$ y_{fs} $	$V_{DS} = 10\text{V}$ , $I_D = 4.5\text{A}$	3.5	6		S
Static Drain-to-Source ON-State Resistance	$R_{DS(on)}$	$I_D = 4.5\text{A}$ , $V_{GS} = 10\text{V}$		250	350	m $\Omega$
Input Capacitance	$C_{iss}$	$V_{DS} = 20\text{V}$ , $f = 1\text{MHz}$		700		pF
Output Capacitance	$C_{oss}$	$V_{DS} = 20\text{V}$ , $f = 1\text{MHz}$		140		pF
Reverse Transfer Capacitance	$C_{rss}$	$V_{DS} = 20\text{V}$ , $f = 1\text{MHz}$		55		pF
Turn-ON Delay Time	$t_{d(on)}$	See specified Test Circuit		14		ns
Rise Time	$t_r$	See specified Test Circuit		19		ns
Turn-OFF Delay Time	$t_{d(off)}$	See specified Test Circuit		200		ns
Fall Time	$t_f$	See specified Test Circuit		80		ns
Diode Forward Voltage	$V_{SD}$	$I_S = 9\text{A}$ , $V_{GS} = 0$		1.0	1.5	V

### Switching Time Test Circuit

