

isc Silicon NPN Power Transistor

2SD1651

DESCRIPTION



- High Breakdown Voltage-
: $V_{CBO}=1500V$ (Min)
- High Switching Speed
- High Reliability
- Built-in Damper Diode

APPLICATIONS

- Designed for color TV horizontal deflection output applications

ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	1500	V
V_{CEO}	Collector-Emitter Voltage	800	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current- Continuous	5	A
I_{CP}	Collector Current-Peak	16	A
P_C	Collector Power Dissipation @ $T_c=25^{\circ}C$	60	W
T_J	Junction Temperature	150	$^{\circ}C$
T_{stg}	Storage Temperature Range	-55~150	$^{\circ}C$

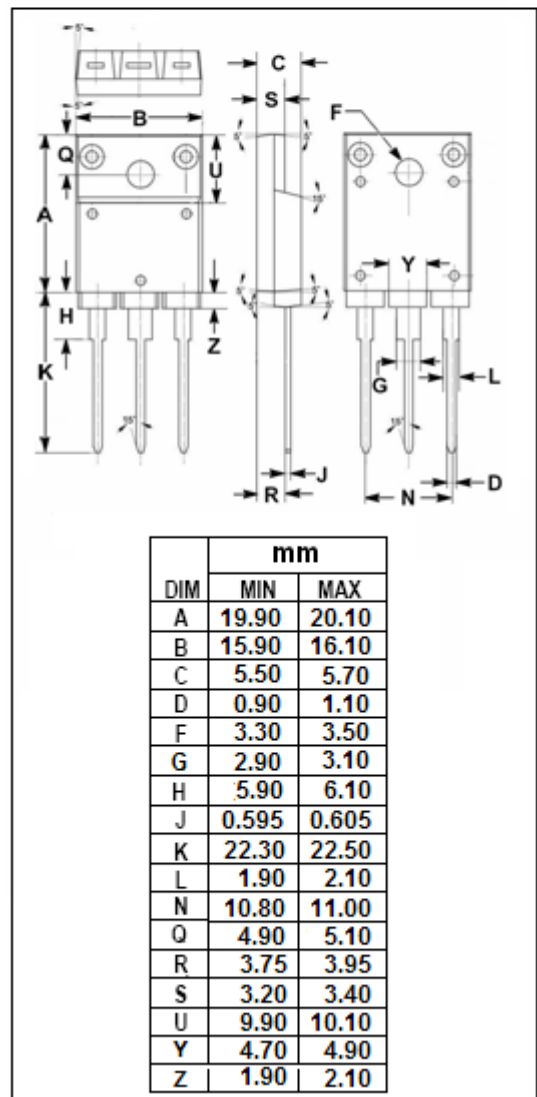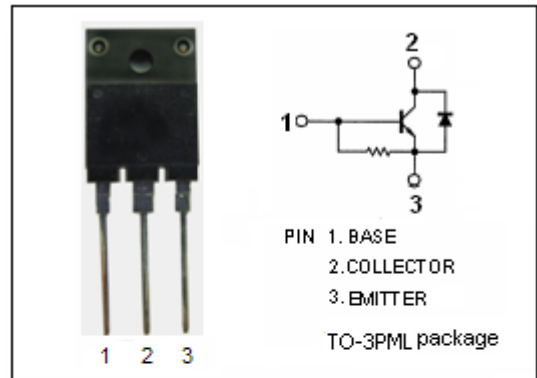

isc Silicon NPN Power Transistor

2SD1651

ELECTRICAL CHARACTERISTICS

T_C=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	I _C = 100mA; R _{BE} = ∞	800			V
V _{(BR)CBO}	Collector-Base Breakdown Voltage	I _C = 5mA; I _E = 0	1500			V
V _{(BR)EBO}	Emitter-Base Breakdown Voltage	I _E = 200mA; I _C = 0	7			V
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = 4A; I _B = 0.8A			5.0	V
V _{BE(sat)}	Base-Emitter Saturation Voltage	I _C = 4A; I _B = 0.8A			1.5	V
I _{CBO}	Collector Cutoff Current	V _{CB} = 800V ; I _E = 0			10	μ A
I _{EBO}	Emitter Cutoff Current	V _{EB} = 4V ; I _C = 0	40		130	mA
h _{FE}	DC Current Gain	I _C = 1A ; V _{CE} = 5V	8			
V _{ECF}	C-E Diode Forward Voltage	I _F = 5A			2.0	V
t _f	Fall Time	I _C = 4A , I _{B1} = 0.8A ; I _{B2} = -1.6A R _L = 50Ω ; V _{CC} = 200V			0.4	μ s

isc Silicon NPN Power Transistor

2SD1651

