


RWS-375 Series

WENSHING®

V1.07

Wireless Hi Sensitivity Receiver Module (RF ASK)

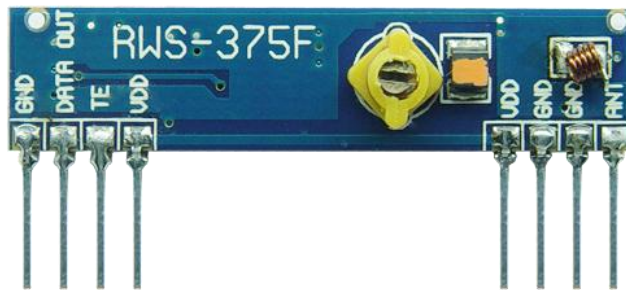

➤ **Model : RWS-375-6 (433.92MHz)**

- *Frequency Range: 433.92MHz
- *Modulate Mode: ASK
- *Circuit Shape: LC
- *Data Rate: 4800bps
- *Selectivity: -108dBm
- *Channel Spacing: ± 500 KHz
- *Supply Voltage: 5V
- * High Sensitivity Passive Design.
- *Simple To Apply with Low External Count.


➤ **Electrical Characteristics :**

Characteristics	Sym	Min	Typ	Max	Unit
Operating Radio Frequency	FC	433.42	433.92	434.42	MHz
Sensitivity	Pref	-106	-108	-110	dBm
Channel Width		-500		+ 500	KHz
Noise Equivalent BW	NEB		5	4	
Baseboard Data Rate				3	KB/S
Receiver Turn On Time				3	ms

➤ **DC Characteristics :**

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Vcc	Operating Supply Voltage		4.9	5	5.1	
I Tot	Operating Supply Voltage			4.5		
V Data	Data Out	1 Data = -10 μ A (Low)	Vcc -0.5	Vcc		V
		1 Data = -10 μ A (Low)			0.3	V

➤ **Size:**

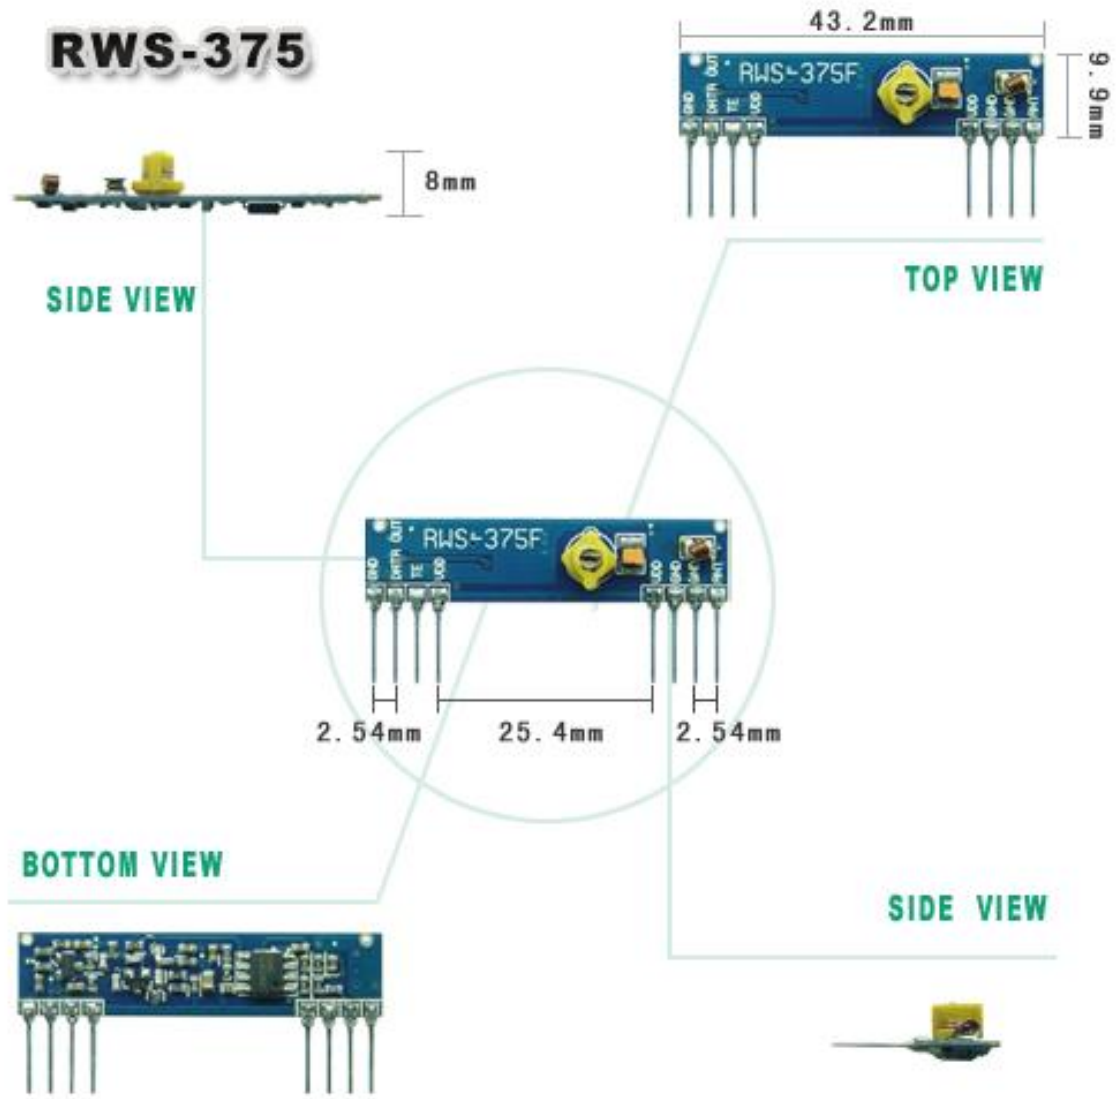

➤ Pin Assignment:



Pin	Function	Description
1	GND	
2	Digital Output	
3	Linear Out	
4	VCC	
5	VCC	
6	GND	
7	GND	
8	ANT	About 13cm

➤ **Demo Circuit:**

