



TMOS Switching

N-Channel — Enhancement



MPF930
MPF960
MPF990



CASE 29-05, STYLE 22
TO-92 (TO-226AE)

MAXIMUM RATINGS

Rating	Symbol	MPF930	MPF960	MPF990	Unit
Drain-Source Voltage	V_{DS}	35	60	90	Vdc
Drain-Gate Voltage	V_{DG}	35	60	90	Vdc
Gate-Source Voltage — Continuous — Non-repetitive ($t_p \leq 50 \mu s$)	V_{GS} V_{GSM}	± 20 ± 40			Vdc Vpk
Drain Current Continuous(1) Pulsed(2)	I_D I_{DM}	2.0 3.0			Adc
Total Device Dissipation @ $T_A = 25^\circ C$ Derate above $25^\circ C$	P_D	1.0 8.0			Watts mW/ $^\circ C$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to 150			$^\circ C$
Thermal Resistance	θ_{JA}	125			$^\circ C/W$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ C$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

OFF CHARACTERISTICS

Drain-Source Breakdown Voltage ($V_{GS} = 0, I_D = 10 \mu A$)	$V_{(BR)DSX}$	35 60 90	— — —	— — —	Vdc
Gate Reverse Current ($V_{GS} = 15 V_{dc}, V_{DS} = 0$)	I_{GSS}	—	—	50	nAdc

ON CHARACTERISTICS(2)

Zero-Gate-Voltage Drain Current ($V_{DS} = \text{Maximum Rating}, V_{GS} = 0$)	I_{DSS}	—	—	10	μA dc
Gate Threshold Voltage ($I_D = 1.0 \text{ mA}$ dc, $V_{DS} = V_{GS}$)	$V_{GS(Th)}$	1.0	—	3.5	Vdc
Drain-Source On-Voltage ($V_{GS} = 10 V_{dc}$) ($I_D = 0.5 \text{ A}$ dc)	$V_{DS(on)}$	MPF930 MPF960 MPF990	— — —	0.4 0.6 0.6	0.7 0.8 1.2
($I_D = 1.0 \text{ A}$ dc)		MPF930 MPF960 MPF990	— — —	0.9 1.2 1.2	1.4 1.7 2.4
($I_D = 2.0 \text{ A}$ dc)		MPF930 MPF960 MPF990	— — —	2.2 2.8 2.8	3.0 3.5 4.8

- The Power Dissipation of the package may result in a lower continuous drain current.
- Pulse Test: Pulse Width $\leq 300 \mu s$, Duty Cycle $\leq 2.0\%$.

MPF930 MPF960 MPF990

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) (Continued)

Characteristic	Symbol	Min	Typ	Max	Unit
ON CHARACTERISTICS(2) (Continued)					
Static Drain–Source On Resistance (V _{GS} = 10 Vdc, I _D = 1.0 Adc)	r _{DS(on)}	—	0.9	1.4	Ω
MPF930		—	1.2	1.7	
MPF960		—	1.2	2.0	
MPF990					
On–State Drain Current (V _{DS} = 25 Vdc, V _{GS} = 10 Vdc)	I _{D(on)}	1.0	2.0	—	Amps

SMALL–SIGNAL CHARACTERISTICS

Input Capacitance (V _{DS} = 25 Vdc, V _{GS} = 0, f = 1.0 MHz)	C _{iss}	—	70	—	pF
Reverse Transfer Capacitance (V _{DS} = 25 Vdc, V _{GS} = 0, f = 1.0 MHz)	C _{rss}	—	20	—	pF
Output Capacitance (V _{DS} = 25 Vdc, V _{GS} = 0, f = 1.0 MHz)	C _{oss}	—	49	—	pF
Forward Transconductance (V _{DS} = 25 Vdc, I _D = 0.5 Adc)	g _{fs}	200	380	—	mmhos

SWITCHING CHARACTERISTICS

Turn–On Time	t _{on}	—	7.0	15	ns
Turn–Off Time	t _{off}	—	7.0	15	ns

2. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

RESISTIVE SWITCHING

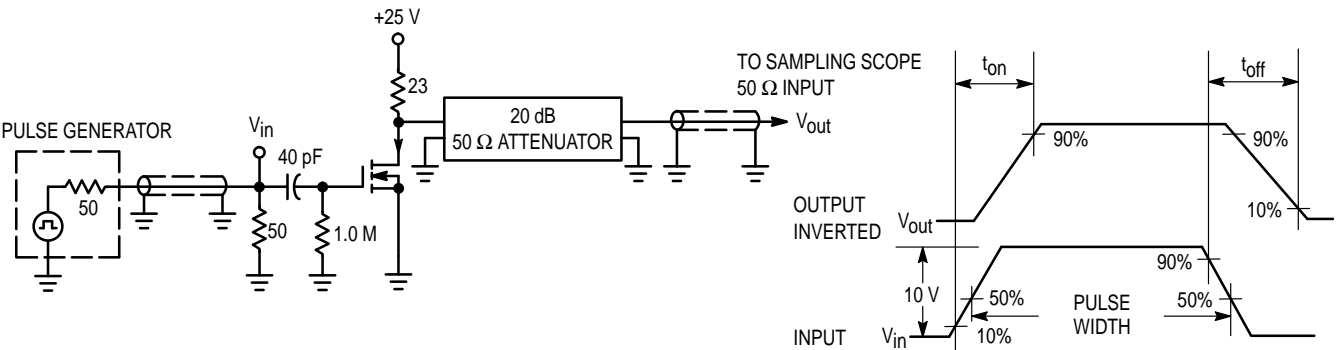


Figure 1. Switching Test Circuit

Figure 2. Switching Waveforms

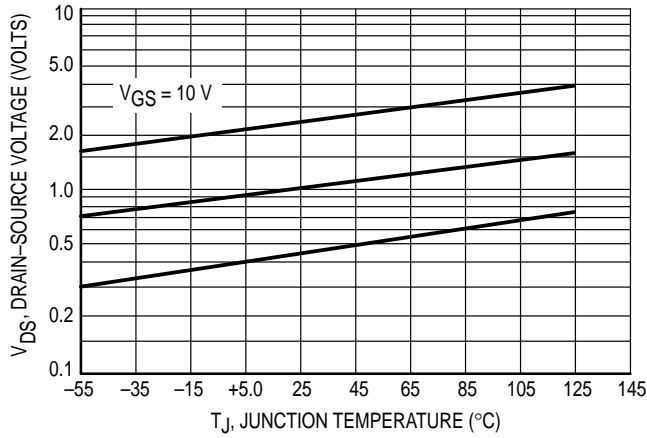


Figure 3. On Voltage versus Temperature

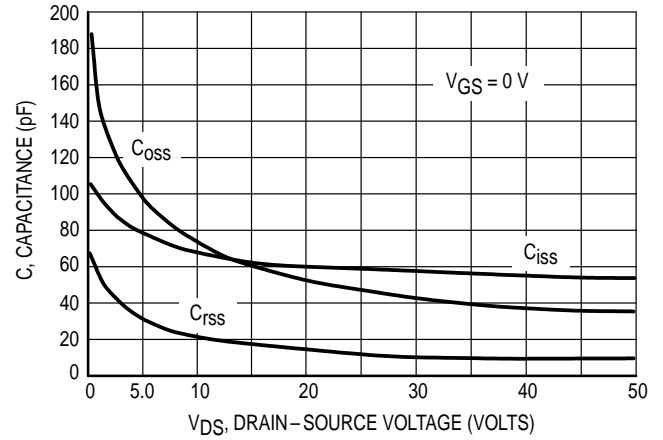


Figure 4. Capacitance Variation

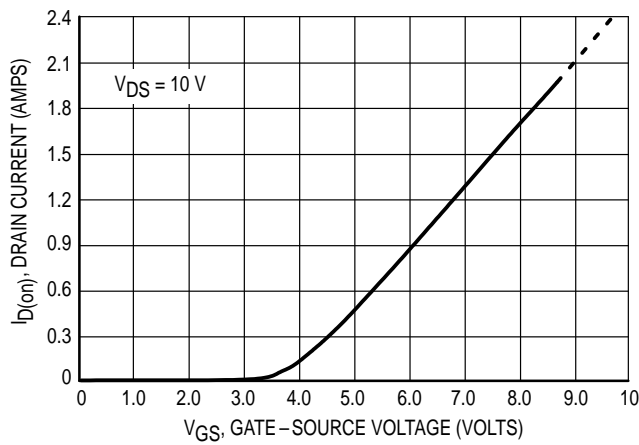


Figure 5. Transfer Characteristic

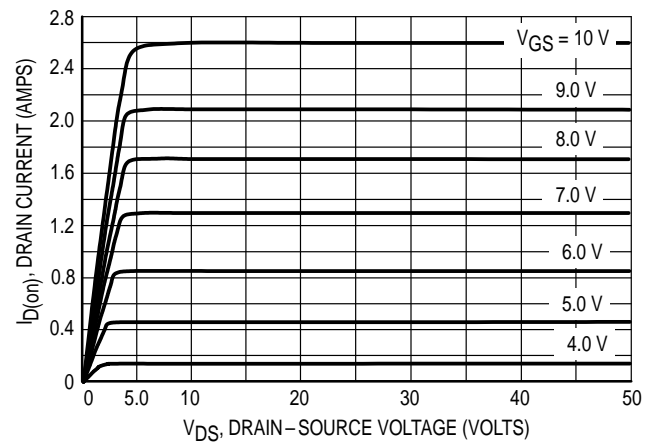


Figure 6. Output Characteristic


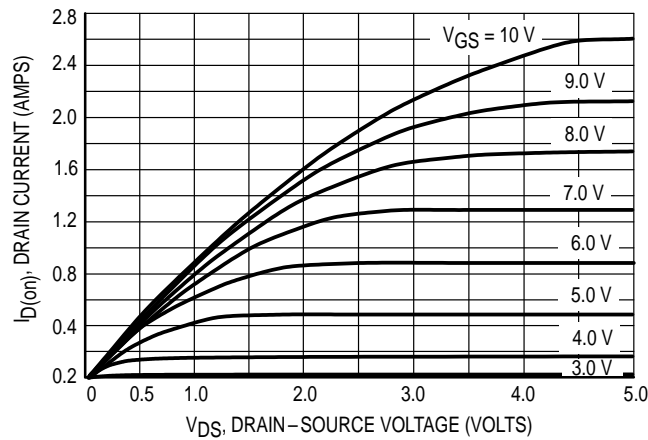


Figure 7. Saturation Characteristic

PACKAGE DIMENSIONS

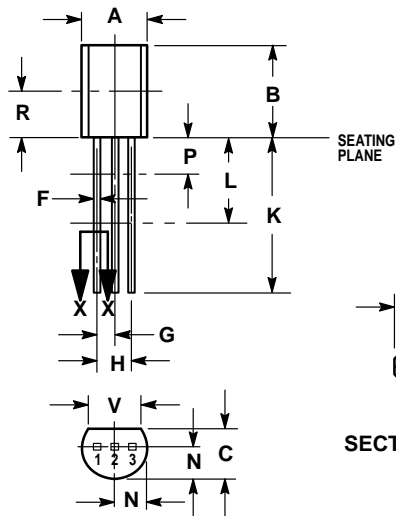

SECTION X-X

NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. DIMENSION F APPLIES BETWEEN P AND L. DIMENSIONS D AND J APPLY BETWEEN L AND K MINIMUM. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.175	0.205	4.44	5.21
B	0.290	0.310	7.37	7.87
C	0.125	0.165	3.18	4.19
D	0.018	0.022	0.46	0.56
F	0.016	0.019	0.41	0.48
G	0.045	0.055	1.15	1.39
H	0.095	0.105	2.42	2.66
J	0.018	0.024	0.46	0.61
K	0.500	—	12.70	—
L	0.250	—	6.35	—
N	0.080	0.105	2.04	2.66
P	—	0.100	—	2.54
R	0.135	—	3.43	—
V	0.135	—	3.43	—

STYLE 22:

- PIN 1. SOURCE
- GATE
- DRAIN

**CASE 029-05
(TO-226AE)
ISSUE AD**

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217. 303-675-2140 or 1-800-441-2447

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 602-244-6609
INTERNET: <http://Design-NET.com>

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, 6F Seibu-Butsuryu-Center,
3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 81-3-3521-8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

