

ATC 800 B Series NPO Ceramic, High RF Power Ultra-Low ESR Multilayer Capacitors

- Case B Size
(.110" x .110")
- Rugged, reliable
NPO dielectric
- Case optimized for
highest self resonant
frequency
- Capacitance Range
0.1 pF to 1000 pF
- Lowest ESR
- Capable of highest
RF Power
- RoHS Compliant / Lead-Free

ATC's 800 B Series offers superb performance in demanding high RF power applications requiring consistent and reliable operation. The combination of highly conductive metal electrode systems, optimized case geometries, and proprietary dielectrics, yields the lowest ESR. ATC's new NPO low loss rugged dielectrics are designed to provide superior heat transfer in high RF power applications. Ultra-low ESR and superior thermal performance insure that the 800 B Series products are your best choice for high RF power applications from VHF through microwave frequencies.

Typical applications: VHF / UHF / HDTV Broadcast Transmitters, Wireless Communications, Public Safety Radio, Avionics, Telecom, WiMAX, Microwave Communication Systems and Satellite Systems.

Typical circuit applications: High RF Power Filter Networks, Combiners, Couplers, Matching Networks, Output Coupling, Antenna Coupling, and DC Blocking and Bypassing.

ENVIRONMENTAL TESTS

ATC 800 B Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A

MOISTURE RESISTANCE:


MIL-STD-202, Method 106

LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C
200% WVDC applied

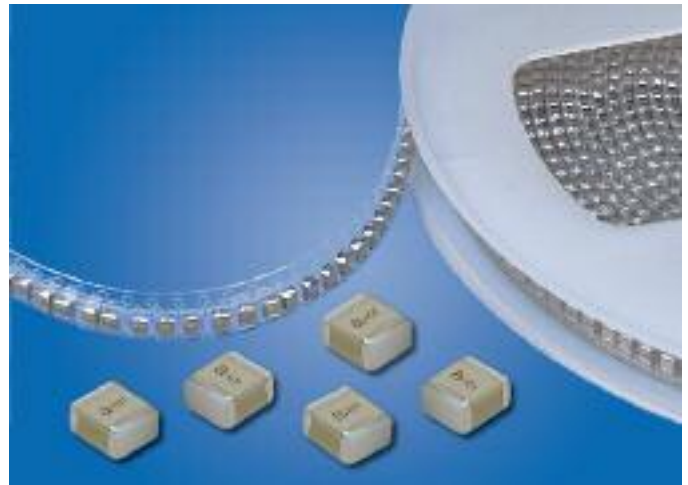

ELECTRICAL AND MECHANICAL SPECIFICATIONS

QUALITY FACTOR (Q): > 2000 @ 1 MHz

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):
0 ±30 PPM/°C (-55°C to +125°C)

INSULATION RESISTANCE (IR):

0.1 pF to 1000 pF:

10⁵ Megohms min. @ +25°C at rated WVDC

10⁴ Megohms min. @ +125°C at rated WVDC

WORKING VOLTAGE (WVDC):

See Capacitance Values Table, page 2

DIELECTRIC WITHSTANDING VOLTAGE (DWV):

Case B: 250% of rated WVDC for 5 secs

RETRACE: Less than ±(0.02% or 0.02 pF), whichever is greater

AGING EFFECTS: None

PIEZOELECTRIC EFFECTS: None

(No capacitance variation with voltage or pressure)

CAPACITANCE DRIFT: ±(0.02% or 0.02 pF), whichever is greater

OPERATING TEMPERATURE RANGE:

From -55°C to +125°C (No derating of working voltage)

TERMINATION STYLES: RoHS Compliant and Solder Plate

See Mechanical Configurations, page 3

TERMINAL STRENGTH: Terminations for chips withstand a pull of 5 lbs. min., 15 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.



A M E R I C A N

ATC North America

sales@atceramics.com

T E C H N I C A L

ATC Europe

sales@atceramics.com

C E R A M I C S

ATC Asia

sales@atceramics-asia.com



www.atceramics.com

ATC 800 B Capacitance Values

CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC
0R1	0.1	B	500	2R4	2.4	B, C, D	500	200	20	F, G, J, K, M	500	151	150	F, G, J, K, M	300
0R2	0.2	B, C		2R7	2.7			220	22			161	160		
0R3	0.3			3R0	3.0			240	24			181	180		
0R4	0.4			3R3	3.3			270	27			201	200		
0R5	0.5			3R6	3.6			300	30			221	220		
0R6	0.6	3R9		3.9	330			33	241			240			
0R7	0.7	4R3		4.3	360			36	271			270			
0R8	0.8	4R7		4.7	390			39	301			300			
0R9	0.9	5R1		5.1	430			43	331			330			
1R0	1.0	5R6		5.6	470			47	361			360			
1R1	1.1	6R2		6.2	510			51	391			390			
1R2	1.2	B, C, D		6R8	6.8	B, C, J, K, M		431	430						
1R3	1.3			7R5	7.5			471	470						
1R4	1.4			8R2	8.2			511	510						
1R5	1.5			9R1	9.1			561	560						
1R6	1.6			F, G, J, K, M	100	10		300	621		620				
1R7	1.7				110	11			681		680				
1R8	1.8				120	12			751		750				
1R9	1.9	130			13	821			820						
2R0	2.0	150			15	911			910						
2R1	2.1	160			16	102			1000						
2R2	2.2	180			18										

$$VRMS = 0.707 \times WVDC$$

• SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE. PLEASE CONSULT FACTORY.

ATC PART NUMBER CODE

Series ATC800 Case Size B Capacitance Code: 91 First 2 significant digits for capacitance. R=Decimal Point

Indicates number of zeros following digits of capacitance in picofarads except for decimal values. 0

Capacitance Tolerance J

T WVDC

500 Termination Code

X Laser Marking

T Packaging

T - Tape & Reel: 500 and 1000 pc. qty. std.*
TV - Vertical Orientation of Product, Tape & Reel: 500 and 1000 pc. qty. std.*
I - Special Packaging. Consult Factory.
*Consult ATC for other quantities

CAPACITANCE TOLERANCE							
Code	B	C	D	F	G	J	M
Tol.	±0.1 pF	±0.25 pF	±0.5 pF	±1%	±2%	±5%	±20%

The above part number refers to a 800 B Series (case size B) 91 pF capacitor, J tolerance (±5%), 500 WVDC, with T termination (Tin Plated over Nickel Barrier Termination, RoHS Compliant), laser marking and tape and reel packaging.

ATC accepts orders for our parts using designations **with** or **without** the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700.

Consult factory for additional performance data.



A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com


ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

ATC 800 B Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS Inches (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIAL
800B	T	B Solderable Nickel Barrier		.110 +.020 -.010 (2.79 +.51 -.25)	.110 ±.015 (2.79 ±0.38)	.070 (1.78) max.	.015 (0.38) ±.010 (0.25)	RoHS Compliant Tin Plated over Nickel Barrier Termination
800B	W	B Solder Plate		.110 +.020 -.010 (2.79 +.51 -.25)	.110 ±.015 (2.79 ±0.38)	.070 (1.78) max.	.015 (0.38) ±.010 (0.25)	Tin/Lead Solder Plated over Nickel Barrier Termination

ATC 800 B Capacitors: Non-Magnetic Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS Inches (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIAL
800B	TN	B Non-Mag Solderable Barrier		.110 +.020 -.010 (2.79 +.51 -.25)	.110 ±.015 (2.79 ±0.38)	.070 (1.78) max.	.015 (0.38) ±.010 (0.25)	RoHS Compliant Tin Plated over Non-Magnetic Barrier Termination

Suggested Mounting Pad Dimensions

Case B Vertical Mount

Cap Value	Pad Size	A Min	B Min	C Min	D Min
All Values	Normal	.090 (2.29)	.050 (1.27)	.075 (1.91)	.175 (4.45)
	High Density	.070 (1.78)	.030 (.762)	.075 (1.91)	.135 (3.43)

Case B Horizontal Mount

Cap Value	Pad Size	A Min	B Min	C Min	D Min
All Values	Normal	.130 (3.30)	.050 (1.27)	.075 (1.91)	.175 (4.45)
	High Density	.110 (2.79)	.030 (.762)	.075 (1.91)	.135 (3.43)

Horizontal Electrode Orientation Vertical Electrode Orientation

inches (mm)

A M E R I C A N T E C H N I C A L C E R A M I C S



ATC North America
sales@atceramics.com

ATC Europe
saleseur@atceramics.com

ATC Asia
sales@atceramics-asia.com

www.atceramics.com

ATC 800 B Performance Data

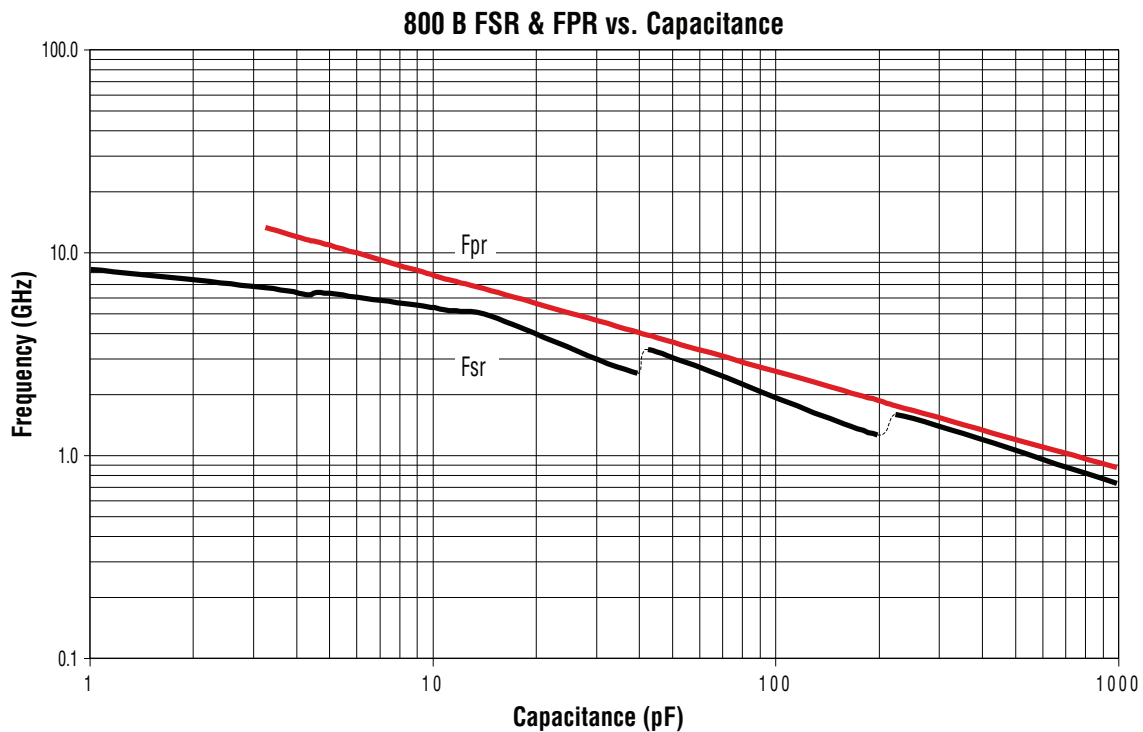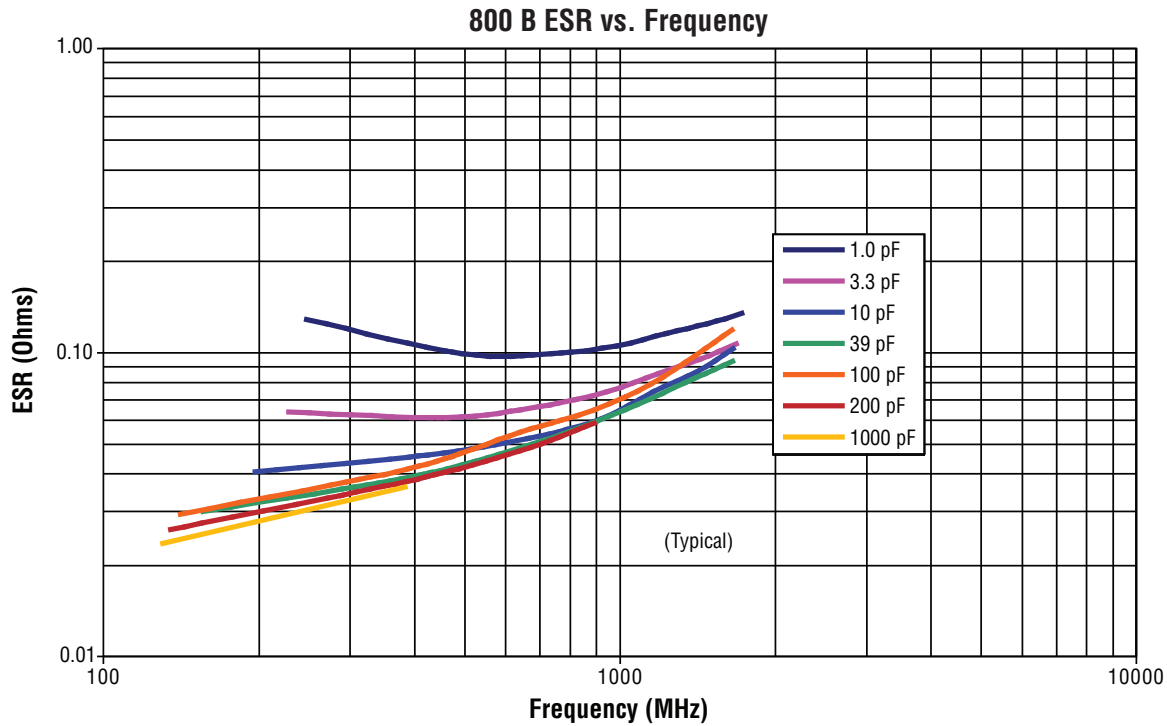

ATC 800 B Series Data Sheet Test Condition Description

Capacitors vertically mounted in series microstrip configuration on 23.3-mil thick Rogers RO4350[®] softboard, 52-mils wide 1/2 oz. Cu traces.

FSR = lowest frequency at which S11 response, referenced at capacitor edge, crosses real axis on Smith Chart.

FPR = lowest frequency at which there is a notch in S21 magnitude response.

A M E R I C A N T E C H N I C A L C E R A M I C S


ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

www.atceramics.com

ATC 800 B Performance Data

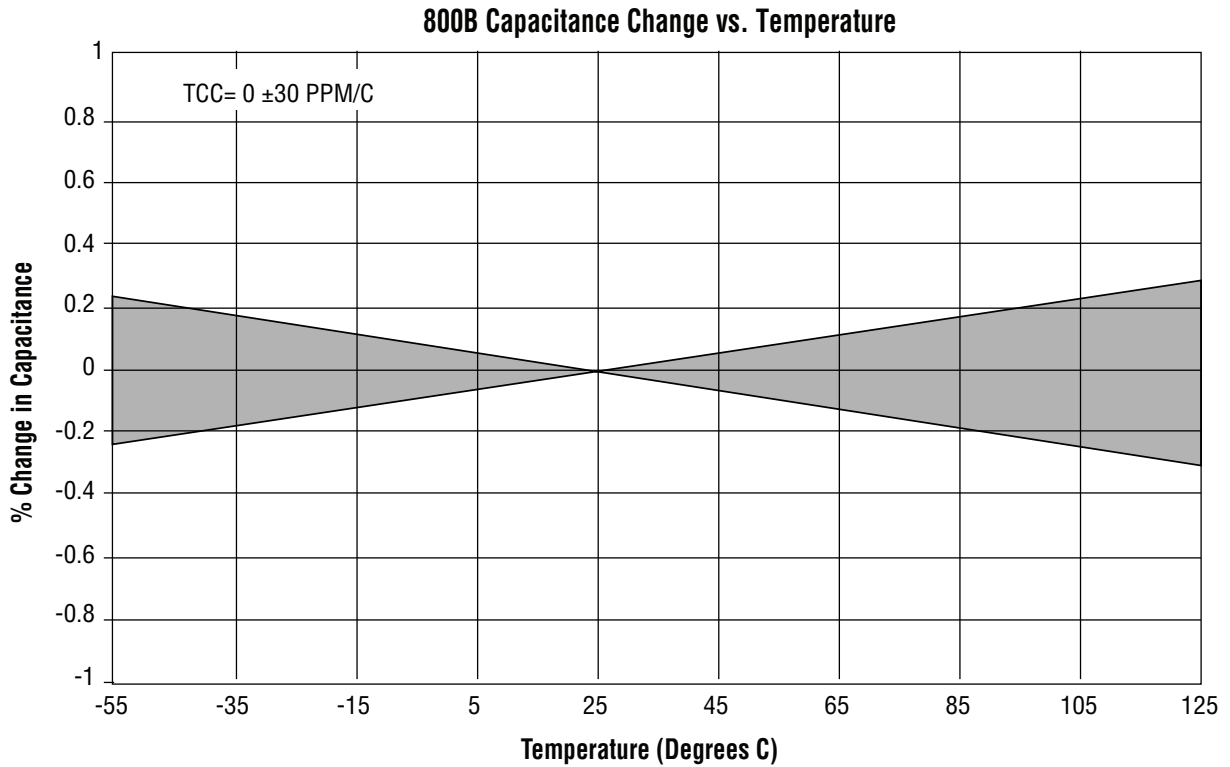

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. B; 12/05). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 2006 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-1033 Rev. I, 6/13

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
saleseur@atceramics.com

ATC Asia
sales@atceramics-asia.com

www.atceramics.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

American Technical Ceramics (ATC):

[800B120GT500XT](#) [800B150GT500XT](#) [800B220GT500XT](#) [800B100FT500XT](#) [800B4R7CT500XT](#) [800B6R8JT500XT](#)
[800B330FT500XT](#) [800B101FT500XT](#) [800B8R2BT500XT](#) [800B180FT500XT](#) [800B102JT50XT](#) [800B3R3CT500XT](#)
[800B220JT500XT](#) [800B270JT500XT](#) [800B560JT500XT](#) [800B5R6BT500XT](#) [800B101GT500XT](#) [800B7R5BT500XT](#)
[800B8R2CT500XT](#) [800B470FT500XT](#) [800B2R0BT500XT](#) [800B1R5BT500XT](#) [800B102KT50XT](#) [800B102JW50XT](#)
[800B5R6CT500XT](#) [800B0R5BT500XT](#) [800B2R0CT500XT](#) [800B151JT300XT](#) [800B3R9BT500XT](#) [800B471JT200XT](#)
[800B6R8BT500XT](#) [800B120JT500XT](#) [800B2R7BT500XT](#) [800B8R2JT500XT](#) [800B6R8CT500XT](#) [800B9R1BT500XT](#)
[800B5R1CT500XT](#) [800B120FT500XT](#) [800B1R2BT500XT](#) [800B0R8BT500XT](#) [800B221JT200XT](#) [800B150JT500XT](#)
[800B180GT500XT](#) [800B150FT500XT](#) [800B220FT500XT](#) [800B2R7CT500XT](#) [800B3R3BT500XT](#) [800B3R9CT500XT](#)
[800B6R2BT500XT](#) [800B2R4BT500XT](#) [800B100GT500XT](#) [800B2R2BT500XT](#) [800B4R7BT500XT](#) [800B7R5CT500XT](#)
[800B3R0BT500XT](#) [800B3R6BT500XT](#) [800B6R2CT500XT](#) [800B101JT500XT](#) [800B1R0BT500XT](#)
[800B1R8BT500XT](#) [800B5R1BT500XT](#) [800B100JT500XT](#) [800B220JW500XT](#) [800B220KT500XT](#) [800B220KW500XT](#)
[800B220MT500XT](#) [800B220MW500XT](#) [800B221FT200XT](#) [800B221FW200XT](#) [800B221GT200XT](#)
[800B221GW200XT](#) [800B221JW200XT](#) [800B221KT200XT](#) [800B221KW200XT](#) [800B221MT200XT](#)
[800B221MW200XT](#) [800B240FT500XT](#) [800B240FW500XT](#) [800B240GT500XT](#) [800B240GW500XT](#) [800B240JT500XT](#)
[800B240JW500XT](#) [800B240KT500XT](#) [800B240KW500XT](#) [800B240MT500XT](#) [800B240MW500XT](#)
[800B241FT200XT](#) [800B241FW200XT](#) [800B241GT200XT](#) [800B241GW200XT](#) [800B241JT200XT](#) [800B241JW200XT](#)
[800B241KT200XT](#) [800B241KW200XT](#) [800B241MT200XT](#) [800B241MW200XT](#) [800B270FT500XT](#)
[800B270FW500XT](#) [800B270GT500XT](#) [800B270GW500XT](#)