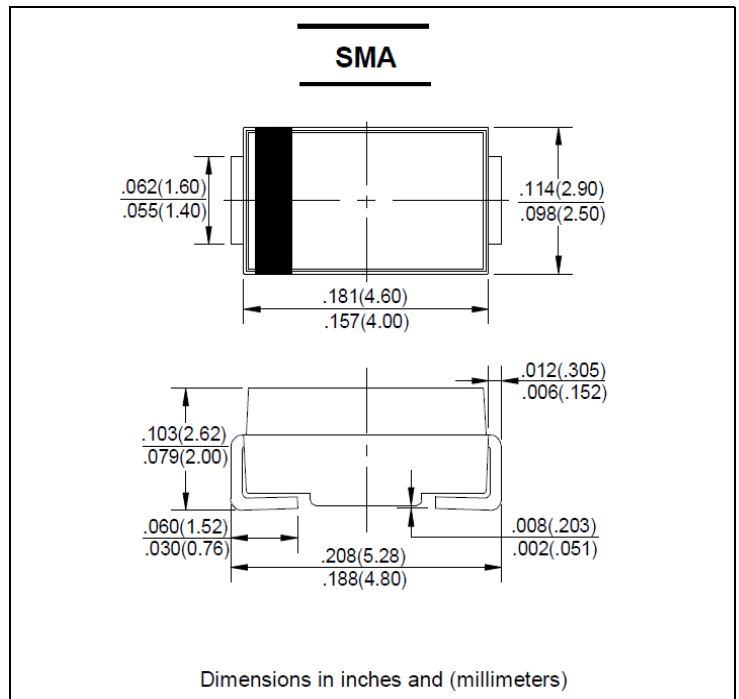


**FEATURES**

- For surface mounted applications
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- Built-in strain relief, ideal for automated placement
- High forward surge current capability
- High temperature soldering guaranteed:  
250°C/10 seconds at terminals
- The plastic material carries U/L recognition 94V-0

**MECHANICAL DATA**

- Case: JEDEC DO-214AC. molded plastic
- Terminals: Axial leads. Solderable per MIL - STD - 750 Method 2026
- Polarity: Color band denotes cathode
- Weight: 0.003 ounce. 0.093 grams
- Mounting position: Any


**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half wave 60HZ. resistive or inductive load. For capacitive load current derate by 20%

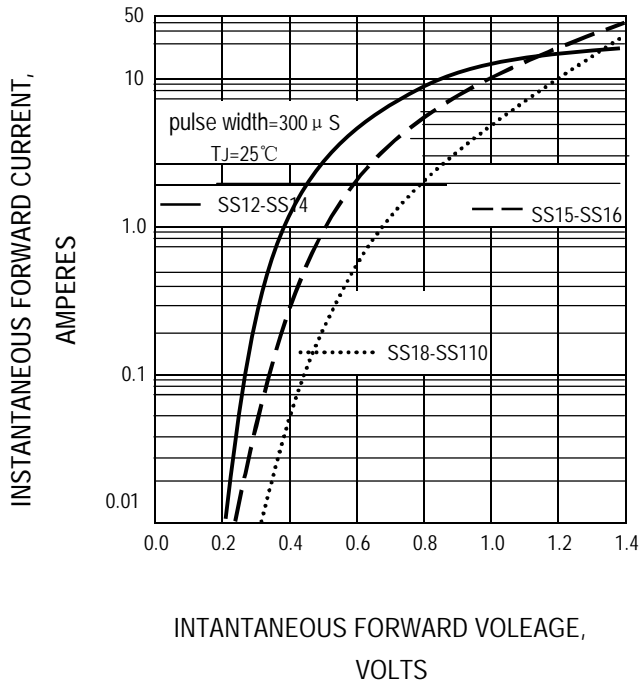
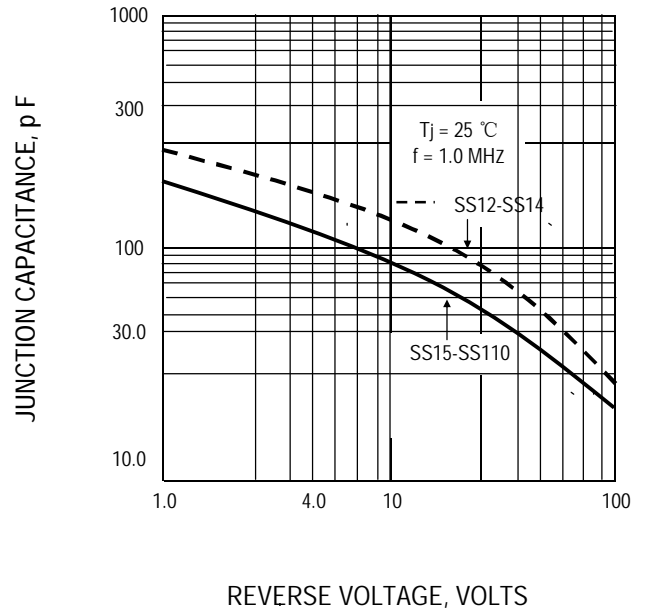
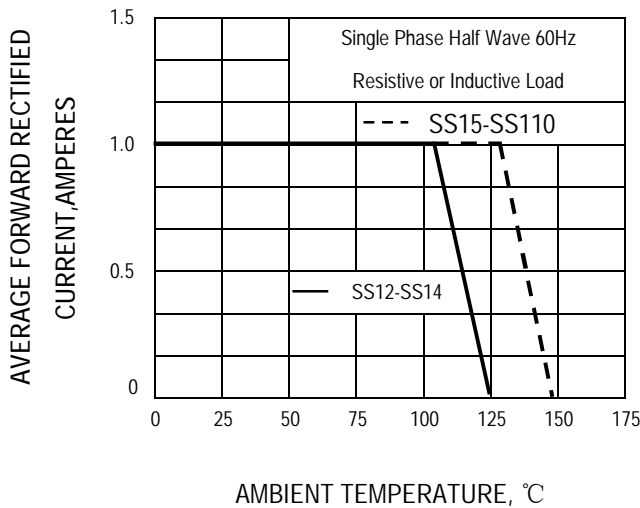
	SYMBOL	SS12	SS13	SS14	SS15	SS16	SS18	SS110	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	50	60	80	100	V
Maximum RMS Voltage	$V_{RMS}$	14	21	28	35	42	56	70	V
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	50	60	80	100	V
Maximum Average Forward Rectified Current 9.5mm Lead Length. $T_A = 75^\circ C$	$I_{(AV)}$	1.0							A
Peak Forward Surge Current 8.3ms Single half-sine-wave superimposed on rated $T_j = 125^\circ C$	$I_{FSM}$	40.0							A
Maximum Forward Voltage at 1.0A DC	$V_F$	0.45	0.55	0.70		0.85		V	
Maximum Reverse Current $T_A = 25^\circ C$ at Rated DC Blocking Voltage $T_A = 100^\circ C$	$I_R$	0.5							m A
		6.0			5.0				
Typical Junction Capacitance (Note 1)	$C_j$	110			90				pF
Typical Thermal Resistance (Note 2)	$R_{QJA}$	88.0							$^\circ C/W$
Operating Junction Temperature Range	$T_j$	- 65 to 125			- 65 to 150				$^\circ C$
Storage Temperature Range	$T_{STG}$	- 65 to 150							$^\circ C$

**NOTE:**

1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
2. P.C.B. mounted with 0.2x0.2 (5.0x5.0mm) copper pad areas

Reverse Voltage: 20 to 100 Volts

Forward Current: 1.0 Ampere

**FIG.1-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

**FIG.2-TYPICAL JUNCTION CHARACTERISTICS**

**FIG.3-FORWARD CURRENT DERATING CURVE**

**FIG.4-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**
