
# **Schottky Barrier Rectifier** MBR2060CT, 2x 10A, 60V, TO-220AB, Common Cathode


# MBR2060CT





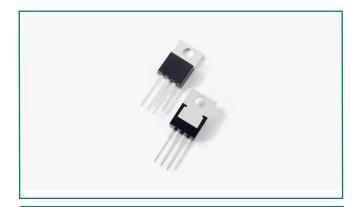

#### Pin out



#### **Description**

The Littelfuse MBR2060CT Schottky Barrier Rectifier is designed to comply with the general requirements of commercial applications for high temperature environments with low leakage and low VF parameters.

It is suitable for high frequency switching mode power supply applications with high inductive loads. This Schottky Barrier diode pair can be used as free-wheeling or flyback diodes to suppress abrupt changes across an inductive load.

#### **Features**

- High junction temperature capability
- Low forward voltage drop
- High frequency operation
- Common cathode configuration in TO-220AB package

#### **Applications**

- · Switching mode power supply
- Free-wheeling diodes (also known as snubber diodes)
- DC/DC converters
- Polarity protection diodes

## **Maximum Ratings**

Parameters	Symbol	Test Conditions	Max	Unit
Peak Inverse Voltage	$V_{_{\mathrm{RWM}}}$	-	60	V
Average Forward Current	I <sub>F(AV)</sub>	50% duty cycle @T <sub>c</sub> =100°C, rectangular wave form	10 (per leg)	Α
			20 (total device)	
Max. Peak One Cycle Non-Repetitive Surge Current (per leg)	I <sub>FSM</sub>	8.3 ms, half Sine pulse	180	А

## **Electrical Characteristics**


Parameters	Symbol	Test Conditions	ditions Max	
Forward Voltage Drop	V	@10A, Pulse, T <sub>J</sub> = 25 °C	0.80	V
	V <sub>F1</sub>	@20A, Pulse, T <sub>J</sub> = 25 °C	0.95	
	V	@10A, Pulse, T <sub>J</sub> = 125 °C	0.70	
	$V_{F2}$	@20A, Pulse, T <sub>J</sub> = 125 °C	0.85	
Reverse Current (per leg)*	I <sub>R1</sub>	$@V_R = rated V_R T_J = 25 °C$	1.0	- mA
	I <sub>R2</sub>	$@V_R = rated V_R T_J = 125 °C$	150	
Junction Capacitance (per leg)	C <sub>T</sub>	$@V_R = 5V, T_C = 25  ^{\circ}C, _{fSI}G = 1MHz$	400	pF
Typical Series Inductance (per leg)	L <sub>s</sub>	Measured lead to lead 5 mm from package body	8.0	nH
Voltage Rate of Change	dv/dt	-	10,000	V/µs

<sup>\*</sup> Pulse Width < 300µs, Duty Cycle <2%


#### **Thermal-Mechanical Specifications**

Parameters	Symbol	Test Conditions	Max	Unit
Junction Temperature	T <sub>J</sub>	-	-55 to +150	°C
Storage Temperature	T <sub>stg</sub>	-	-55 to +150	°C
Maximum Thermal Resistance Junction to Case	R <sub>eJC</sub>	DC operation	2.3	°C/W
Typical Thermal Resistance Case to Heat Sink	R <sub>ecs</sub>	Mounting surface, smooth and greased	0.5	°C/W
Approximate Weight	wt	-	2	g
Case Style	TO-220AB			


# **Figure 1: Typical Forward Characteristics**

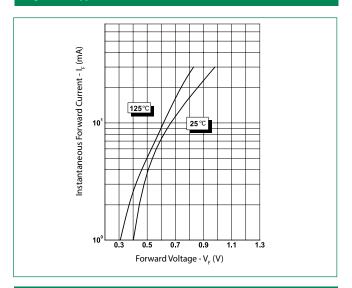

**Figure 3: Typical Junction Capacitance** 

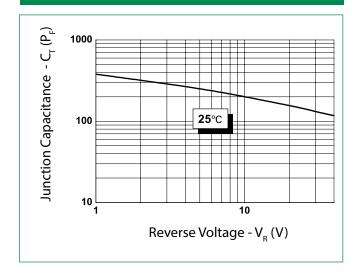


# **Figure 2: Typical Reverse Characteristics**




# Schottky Barrier Rectifier MBR2060CT, 2x 10A, 60V, TO-220AB, Common Cathode

## **Dimensions-TO-220AB**








Symbol	Millimeters		
	Min	Max	
Α	3.56	4.83	
<b>A</b> 1	0.51	1.40	
A2	2.03	2.92	
b	0.38	1.02	
b1	1.14	1.78	
С	0.31*	0.61	
D	14.22	16.51	
D1	8.38	9.15*	
E	9.65	10.67	
е	2.54	-	
e1	4.98*	-	
H1	5.84	6.86	
L	12.70	14.73	
L1	-	6.35	
øΡ	3.53	4.09	
Q	2.54 3.43		

Footnote \*: The spec. does not comply with JEDEC spec.


# **Packing Options**

Part Number	Marking	Packing Mode	M.O.Q.	
MBR2060CT	MBR2060CT	50pcs / Tube	1000	

# **Tube Specification**



# **Part Numbering and Marking System**



 MBR
 =Component Type

 B
 =Package Type

 20
 =Forward Current (20A)

 60
 =Reverse Voltage (60V)

 CT
 =Configuration

 LF
 =Littelfuse

 YY
 =Year

 WW
 =Week

 L
 =Lot Number

©2018 Littelfuse, Inc. Specifications are subject to change without notice. Revision: 10/01/18

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse: MBR2060CT